


IPC7010

IEEE 1588 Master and Slave IP Core

About IPC7010

The IPC7010 utilizes IPClock's state-of-the-art technology for IEEE 1588 v2 optimized for providing high quality frequency synchronization and Time of Day (ToD) over packet switched networks. Clock synchronization is required by many applications. For example, Universal Mobile Telecommunications System (UMTS) frequency-division duplexing (FDD) requires the synchronization of frequency while Long-Term Evolution (LTE) requires frequency synchronization, phase alignment and accurate time of day (ToD). The IPC7010 is an IP Core leveraging Xilinx® Zynq FPGA supporting 16MB of FLASH memory and 128MB of DDR3 memory. The IPC7010 is an application-agnostic, cost effective, reliable and standard compliant IEEE 1588 v2 designed for enabling applications requiring high synchronization level. The IPC7010 is designed for easy field upgrades to support future enhancements as well as future clock synchronization standards.

IPC7010 Functional Block Diagram

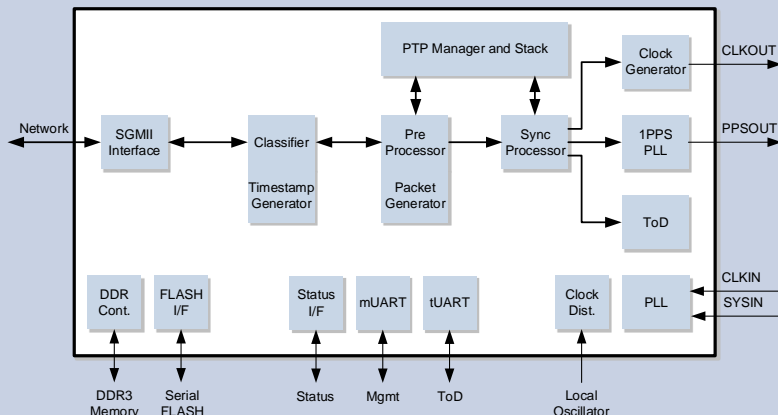

The IPC7010 can be set to operate as either IEEE 1588 Master or Slave. IEEE 1588 protocol is a bidirectional protocol requiring all ports to transmit and receive IEEE 1588 packets. Each packet received its time-stamp by the Timestamp Generator and classified by the Classifier. In the case the packet is IEEE 1588 packet it is sent to the Pre-Processor along with its timestamp. The Pre-Processor is transferring the received general packets to the PTP Manager and Stack for further processing. In the case of IEEE 1588 event packet the Pre-Processor compensate for part of the packet network impairments and prepare the data for the Sync Processor. The Sync Processor is comprised of a suite of algorithms that processes the data and controls the 1PPS PLL, the programmable clock output of the Clock Generator, and the ToD. The ToD is communicating with the ToD UART utilizing the NMEA protocol for either providing or getting the ToD from a GPS. The IEEE 1588 packets are transmitted by the Packet Generator which is controlled by the PTP Manager and Stack. Each packet transmitted is time-stamped by the Timestamp Generator and this timestamp is either embedded into the packet or sent to the Pre-Processor depending on the packet type and selected mode of operation.

Main Features and Benefits

- Standalone IEEE 1588 v2 standard Master and Slave IP core for Xilinx Zynq
- Excellent synchronization performance over most extreme packet transport network conditions
- Slave ToD alignment error is better than $\pm 1\mu\text{sec}$ on a managed 10-switch GbE network under ITU-T G.8261 conditions (*)
- Slave frequency accuracy performance is better than 16ppb on a managed 10-switch GbE network under ITU-T G.8261 conditions (*)
- Adaptive to network impairments
- Provides precision holdover
- Slave meets 3G, 4G-LTE frequency and ToD accuracy
- SGMII interface
- Hybrid IEEE 1588/SyncE support. Requires external SyncE PLL.
- Supports up to 64 slaves/channels
- Supports Unicast/Multicast
- Supports one step / two steps
- Low total cost of ownership
- Zero touch approach can make external CPU redundant
- Upgradeable by software
- Easy adding of enhancements and supporting emerging clock synchronization standards
- Operates with either TCXO or OCXO (20MHz)
- Interfacing generic PHY
- Modes of operation: Free run, Trace, Lock and Holdover

(*) The performance tested under the ITU-T G.8261 tests suite provide an indication for IPClock's technology capabilities and is not guaranteed across all types of network elements and networks conditions. Please contact IPClock's support for more information.